

IXI SNG + FLY PACK

SMART TRANSMISSION



IXI SNG + FLY PACK

SMART TRANSMISSION

SPÉCIFICITÉS TECHNIQUES

- Table de mixage analogique
- 2 Passerelles 2W GSM
- 2 Inserts RTC
- Précâblage pour Codec RNIS
- Système intercom Prospect K6R
- 1 ou 2 caméras Stand-up
- P2 / KiPro recorder
- Double GSM codec



IXI 5 – F495

Lengths : 5.80 m **Widths :** 2.40 m **Height :** 2.95 m

Mercedes Sprinter DJ-340-AB - Location : Paris (75)



Captation monocraméra



Swedish 1,50m antenna
180W phased combined Stellar HPA
2+1 ATEME CM5000 encoders with Teamcast
modulators/ 2 DR5000 IRD



32ATri P+N
Fisher Panda Power Generator

FLY SNG


SPÉCIFICITÉS TECHNIQUES

KU FLY PACK

- F146
- Gigasat
- FA 180
- 1,80m motorized antenna
- Assembled in less than 10 minutes
- 400W 1+1 HPA linear Ku Band
- 2+1 ATEME CM5000 encoders with Teamcast modulators
- 2 DR5000 IRD
- Location : Paris
- 16 amp
- 2 cases for antenna , and cases for equipments
- Our 1,80m motorize disconceived to provide you a reliable and strong transmitting solution where you need it

KA IP FLYPACK

- 1m CommSatantenna
- Eutelsat compliant
- 6Mbits symetric non guaranteed link
- Dedicated News Spotter available on request

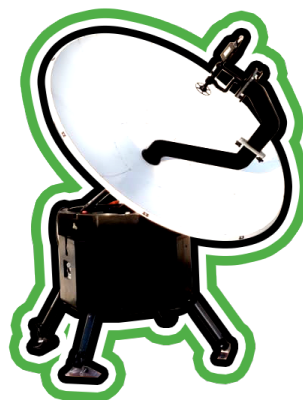

OPTIONS

SEGMENT SPATIAL

SNG FEED

FIBRE

LIVE STREAMING